

PVC Coated Drain Insert

Weldable floor drain with mechanical membrane attachment

PRODUCT OVERVIEW

A one-piece spun aluminum floor drain with a PVC coated flange and aluminum clamp ring for a sealed connection to DeckRite membranes.

PRODUCT DESCRIPTION

The PVC coated drain insert offers mechanical attachment of the membrane with an aluminum clamp ring. Its weldable PVC coated flange seals the membrane to the drain body.

PRODUCT CONSTRUCTION

One-piece spun aluminum body with a PVC coated flange, aluminum clamp ring and removable grate.


The one-piece body provides a leak-proof drain. No caulking is required.

PRODUCT & PACKAGING DATA

PROPERTY	VALUE
Overall flange diameter	8-1/2 in. (216 mm)
Finished grate diameter	4-3/4 in. (121 mm)
Overall height	2-1/8 in. (54 mm)
Drain opening	2 in.
Outlet pipe outside diameter	3-3/8 in. (86 mm)
Weight	.75 lbs. (12 ounces)
Packaging	Sold in single units

COMPATIBILITY

Compatible with all DeckRite membranes.

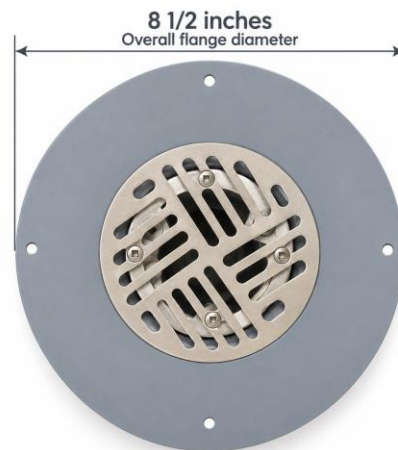

APPLICATION / INSTALLATION

- Attach the membrane mechanically with the aluminum clamp ring.
- Weld the membrane to the PVC coated flange to seal it to the drain body.
- No caulking is required.

Follow current DeckRite installation requirements and applicable safety procedures for the project conditions.